



Architectural Metal, Inc.

Contemporary Solutions & Innovations

Product Data Sheet


Snap Lock Panel 1" & 1.5"

Panel Specification

- Part ID: SLP1 or 1.5
- Concealed fastened and snap together Panel System
- Applies over solid substructure
- Panels can be installed horizontal or vertical and are interchangeable for accent effect
- Tapered Panels are available
- Minimum Roof Slope: 3:12
- Panel Coverage: 7.5" to 30"
- Panel Length: delivery available up to 52'
- Panel Rib Height: 1" or 1.5"
- Minimum Curving Radius: not available
- Material: Aluminum, Copper, Stainless Steel, Brass

Testing Information

- ASTM E283 - Air Filtration
 - ASTM E331 - Water Infiltration
 - ASTM E1592 - Wind Uplift Capacity
 - UL 580 Class90 - Uplift Test
 - UL Class4 Hail - Impact Resistance
 - DADE PA125 - Uplift Test
 - DADE Submittal - TAS 100-95 & ASTM E8-01
- Wind and Wind Driven Rain Resistance of Discontinuous Roof Systems

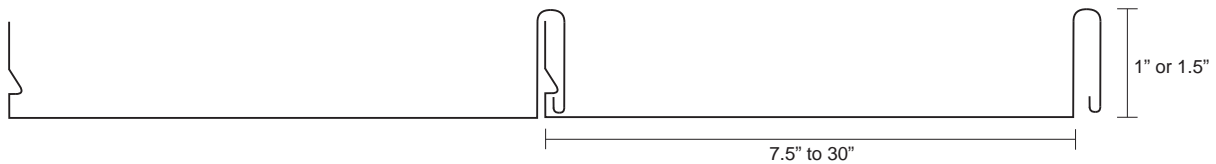

17101 S. Central Ave., Unit 1F, Carson, CA 90746

Phone 310.761.1172

WWW.CSIMETALINC.COM